


Distributed by Astro Alloys Inc. Houston, Texas 1-877-937-3838

Filtration and Lubrication Products for Compressed Air Systems

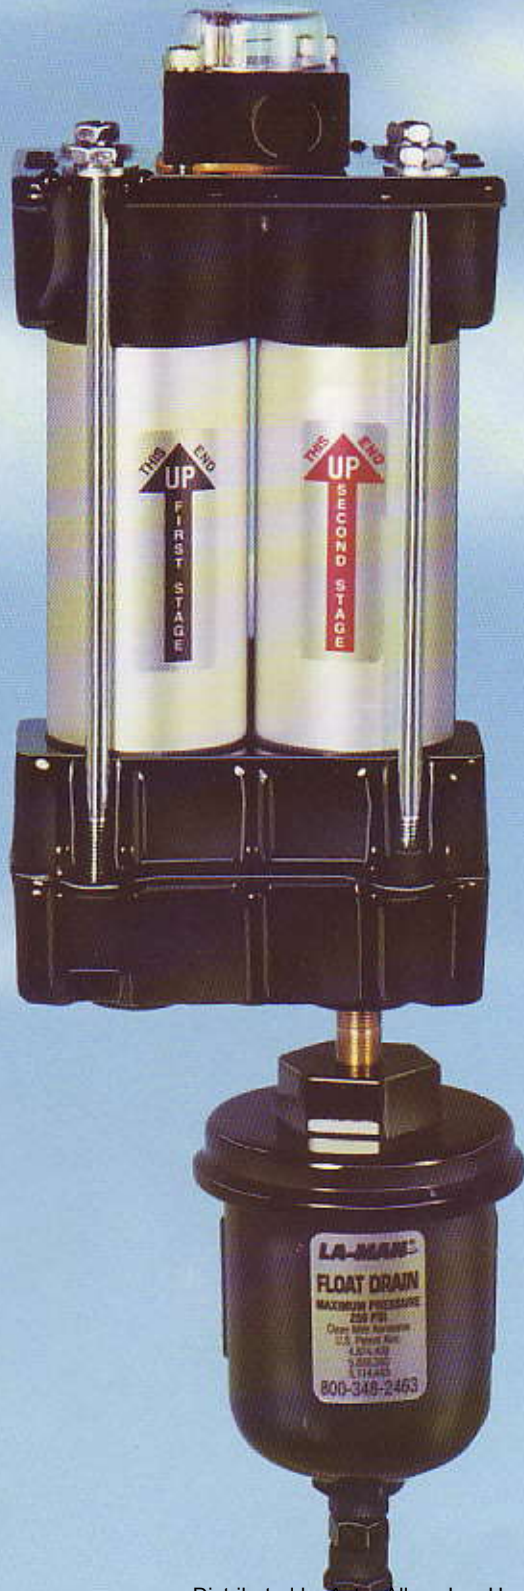


*We make
compressed
air work[®]*

LA-MAN

Distributed by
CLEMTEX, INC.
Houston, Texas 77220 • Box 15214
713 672-8251
Corpus Christi, Texas 78405 • Box 5036
512 882-8282
Dallas, Texas 75247 • Sovereign Row
214 631-0584

Distributed by Astro Alloys Inc. Houston, Texas 1-877-937-3838

La-Man Extractor / Dryer® Filtration System

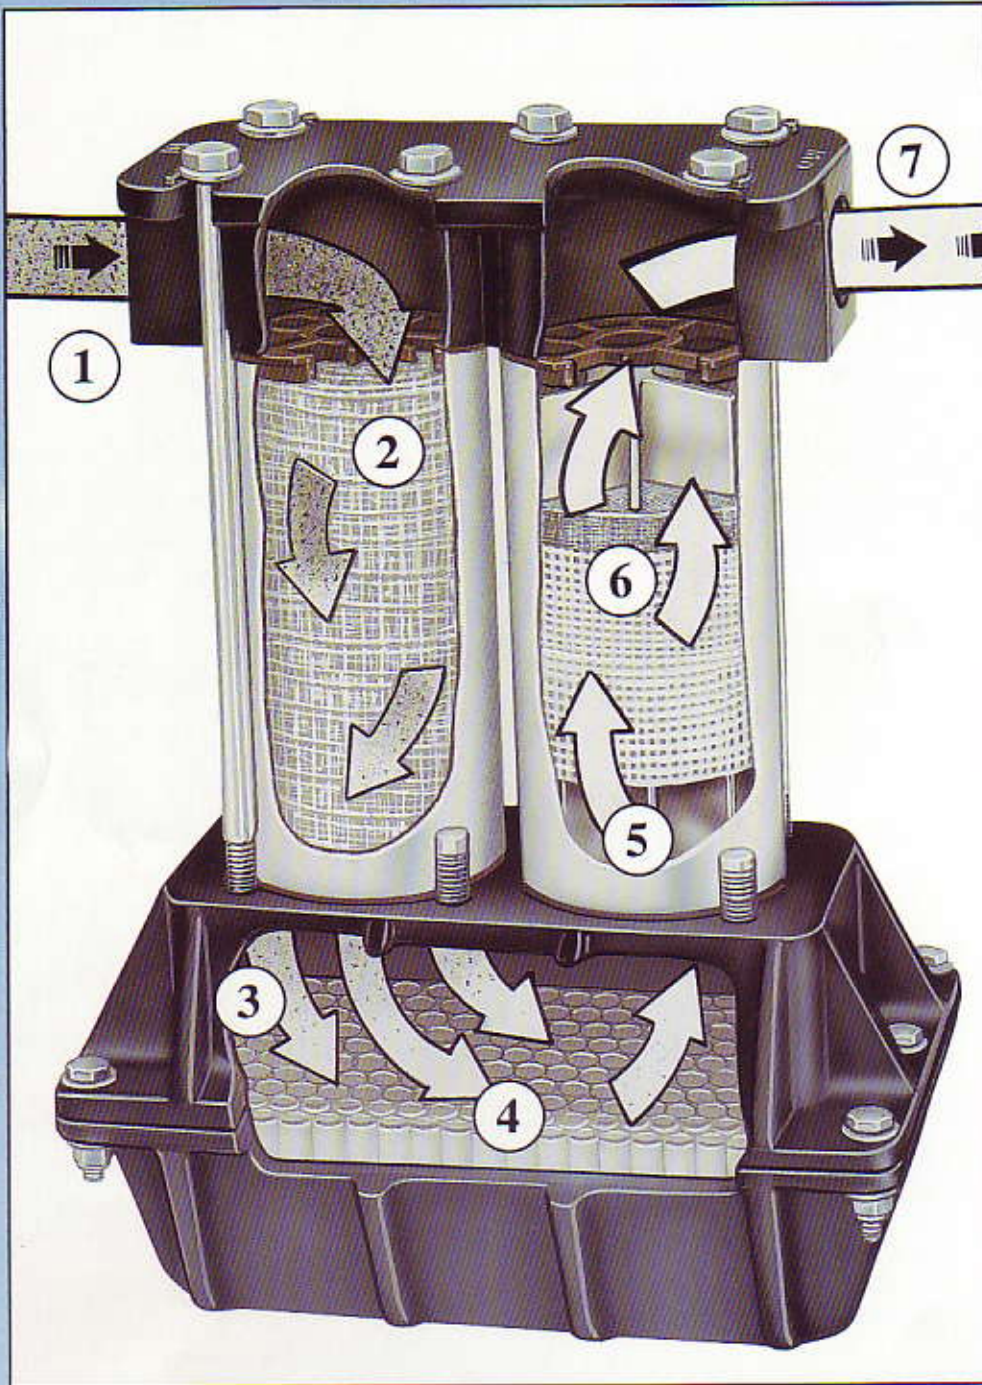

1. Compressed air containing tiny particles of dirt, dust, oil, rust and moisture, enters the first stage of the La-Man Extractor/Dryer.

2. A coalescing effect occurs as air passes through a cartridge mesh filter which captures larger particles and causes moisture to form larger droplets.

3. Air velocity lessens as it enters the extraction chamber allowing particles to collect and moisture to condense on the honeycomb.

4. Particle laden water flows along the bottom and out the drain.

5. Air passes through the second stage wire supported fiber filter cartridge which captures remaining particles down to 5 microns.

6. Remaining moisture and contaminants are dried and filtered in the second stage filter.

7. Exhaust air is clean and dry - no dirt, rust, oil, or water drops to disrupt air equipment operation.

SPECIFICATIONS

Model	520A	520B	105	106	107	110	111	120	140	180	195A
NPT	1/4"	1/4"	1/4"	3/8"	1/2"	1/2"	3/4"	1"	1-1/2"	2"	4" Flange
SCFM	15	15	50	50	50	80	80	150	250	500	2000
MAX. PSI	250	250	250	250	250	250	250	250	250	150	150
SIZE	7-1/8 x 3 x 1-1/4	8-1/4 x 3 x 1-3/4	8-1/4 x 4 x 2-1/2	8-1/4 x 4 x 2-1/2	8-1/4 x 4 x 2-1/2	11-3/4 6 x 3-1/4	11-3/4 6 x 3-1/4	15 x 9-1/2 x 5-1/2	20 x 12-1/2 x 7-1/4	27 x 18 x 9-3/4	42-1/2 x 32 x 17
APPR. WT.	2#	2#	3#	3#	3#	6#	6#	15#	36#	70#	375#

The La-Man[®] Extractor/Dryer[®] is the original two-stage air quality filtration system which removes harmful moisture and contaminants from your compressed air lines. The first stage coalesces water droplets, oil and rust particles that clog air equipment.

The second stage captures anything remain-

ing. The result? Clean dry air and a cost savings. Extractor/Dryer models are available from 15-2000 SCFM and come with a standard 5 micron filter. Lower micron filters are available if needed.

Other applications are: spray painting, air operated plasma cutters, the dental market, food processing

plants, and air logic operations. These are just a few areas where we can give you the best results for your money.

We at La-Man have a complete staff of engineers to give our customers the best service possible in air filtration. Call us toll free for your local distributor.

